






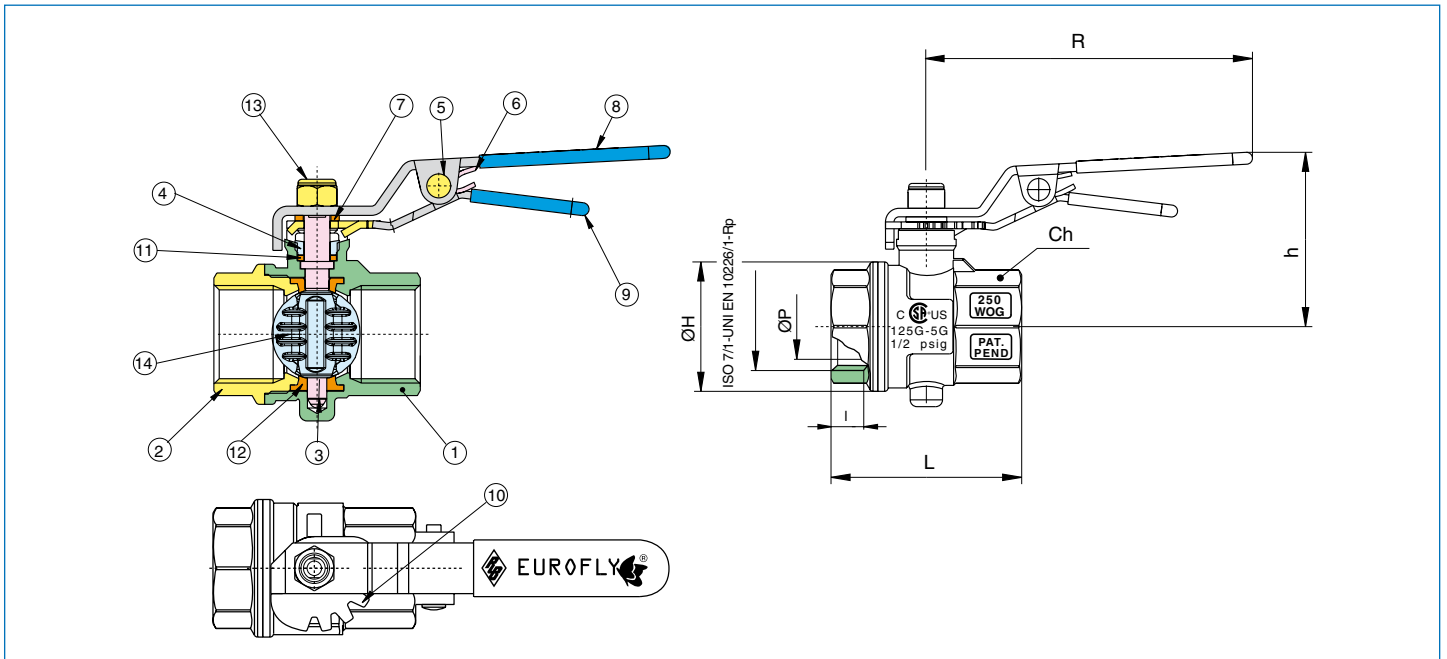
serie **EUROFLY**

Art. **600000**

**BREVETTATA  
PATENTED**



-  Valvola a farfalla in ottone a passaggio totale, filettatura F/F con sistema di regolazione del flusso.
-  Brass butterfly valve full bore, F/F threaded with throttling.
-  Vanne à papillon en laiton taraudée F/F avec système de réglage d'écoulement.
-  Absperkklappe aus Messing, beiderseits Innengewinde mit Durchflussregler.
-  Válvula mariposa en latón, roscas hembra / hembra con sistema de regulación del flujo.



POS.	DENOMINAZIONE	PART NAME	DESCRIPTION	TEILBENENNUNG	DENOMINACION	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	CORPO	BODY	CORPS	GEHÄUSE	CUERPO	OTTONE CW617N UNI EN 12165	1
2	MANICOTTO	END CONNECTION	MANCHON	MUFFE	MANGUITO	OTTONE CW617N UNI EN 12165	1
3	ASTA	STEM	TIGE	EJE	EJE	OTTONE CW614N UNI EN 12164	1
4	GHIERA	WASHER	EMBOUT	RING	ANILLO ROSCADO	OTTONE CW614N UNI EN 12164	1
5	SPINA	LOCK PIN	PRISE	STIFT	ESPINA	ACCIAIO	1
6	MOLLA	SPRING	RESSORT	FEDER	RESORTE	ACCIAIO PER MOLLE	1
7	GUARNIZIONE ANTIATT.ASTA	ANTIFRICTION SEAT	JOINT ANTI-FRICTION	STÖBHEMME DICHUNG	ASINTO CONTRA FRICCIÓN EJE	PTFE CARICATO GRAFITE	1
8	LEVA	HANDLE	POIGNÉE	HANDHEBEL	PALANCA	ACCIAIO DD11 UNI EN 10111	1
9	LEVA	HANDLE	POIGNÉE	HANDHEBEL	PALANCA	ACCIAIO UNI EN 10111	1
10	FERMO MANOVRA	HALF TURN STOP	ARRÊT DE MANOEUVRE	ANSCHLAG	PARO MANIOBRRA	ACCIAIO UNI EN 10111	1
11	GUARNIZIONE ASTA	STEM SEAL	JOINT DE L'AXE	SPINDEL DICHUNG	JUNTA EJE	PTFE	1
12	GUARNIZIONE FARFALLA	SEAT	JOINT DU PAPILLON	MANSCHETTE	ASIENTO MARIPOSA	EPDM	1
13	DADO	NUT	ECROU	MUTTER	TUERCA	ACCIAIO CL 04	1
14	LENTE	DISC	PAPILLON	KLAPPE	LENTE	PEI (ULTEM 1000)	1

MISURA SIZE	DN	€	BOX	MASTER BOX	ØP	I	Ch	ØH	L	h	R	Kv	PN	Kg
1/2"	15	8,43	50	100	16	15	25	31	48,5	46,5	95	8,5	16	0,19
3/4"	20	10,25	25	50	21	16,3	31	38	56	50,5	95	17	16	0,25
1"	25	13,56	20	40	27	19,1	38	46	64	54	95	27	16	0,36
1"1/4	32	20,86	12	24	34	21,4	48	55,5	76	71,5	120	50	16	0,67
1"1/2	40	28,01	10	20	41	21,4	54	65,5	82	76,5	120	82,5	16	0,88
2"	50	38,39	4	8	52	25,7	67	77,5	93	86,5	150	136,5	16	1,31
2"1/2	65	130,97	2	4	65	30,2	90	102	112	121	205	240	16	3,06
3"	80	170,68	-	4	80	33,3	105	122	129,5	131,5	205	340	16	4,67
4"	100	209,42	-	2	103	39,3	130	145	146	145	205	550	16	6,29

Limiti di temperatura: -10°C + 130°C - Temperature range: -10°C + 130°C.